



Compound
Customized to your needs.

Saxomer® TPE Compounds



Saxomer TPE Compounds
Soft touch for your life

Saxomer O Impact | Saxomer S Flex | Saxomer T Eco

www.pcw.gmbh

Saxomer® O Impact

Saxomer O impact is a thermoplastic elastomer (TPE-O) physical alloys between polyolefine (PP) "hard segment" and POE, EPR or EPDM "soft segment", with the addition of fillers and plasticizers.

Hardness: 75A - 60D | Density: 0.86 - 1.30

Why you should use our TPE-O

- resistance to acid, base and detergent
- Extrusion, Injection and Blow Molding suitable product
- very economical solution
- 100% recyclable
- flexible at low temperature
- excellent surface
- colored grades is possible
- service temperature from -40°C to +100°C
- non hygroscopic, pre drying is not necessary
- good tear resistance
- easy to color
- very good ozone and UV resistance



Spray protection

Mud flap

Further products and informations
are available on request!
+49 (0) 3423 661 0
info@pcw.gmbh



Diving goggles and Flippers

Saxomer® S Flex

Saxomer S Flex is a thermoplastic elastomer based on Styrenic Block Copolymers (TPE-S): physical alloys between polyolefines (PS/PP/PE) 'hard segment' and styrene block polymers (SBS, SEPS, SEBS, SEEPS) 'soft segment', with the addition of different fillers, plasticizers and stabilizers.

Hardness: 0A - 65D | Density: 0.89 - 1.45

Why you should use our TPE-S (SEBS)

- resistance to weathering, ozone, UV and impact
- 100% recyclable
- translucent and transparent forms are possible
- provides quite higher saving on the processing cost
- non hygroscopic, pre-drying is not necessary
- densities between 0,89 and 1,45 g/cm³
- low cost solutions are highly possible
- service temperature from -40°C to +130°C
- wide hardness range (0 ShA up to 65 ShD)
- very easy to color
- resistance to acid, base and detergents
- adhesion to PA, ABS, PS and PC, engineering plastics
- adhesion to PVC
- very good abrasion resistance
- some special grades, resistant to bacterial attack and fungus growth
- antistatic compounds possible
- almost all grades complying to FDA regulations
- KTW approved drinkwater



Toothbrush handles

Rubber of shower head



Car mats



Dumbbells



Drill machine



Pocket knife



Profile



Cables

Saxomer® T eco

Saxomer T eco is a thermoplastic elastomer based compound, which is based on styrene-butadiene-styrene (SBS) block copolymers that behaves like rubber at room temperature and has advantage of easy processing. SBS will be produced with the addition of different fillers, plasticizers and stabilizers.


Hardness: 10A - 65D | Density: 0.89 - 1.40



Razor

Why you should use our TPE-S (SBS)

- lower price
- non-hygroscopic, pre drying is not necessary
- flexible between -30°C and +65°C
- hardness between 10 ShA - 65 ShD
- direct coloring during processing is possible
- better bond ability to non-polyolefin substrates
- density ranges between 0,89 and 1,40 g/cm³
- 100% recyclable
- compounding versatility

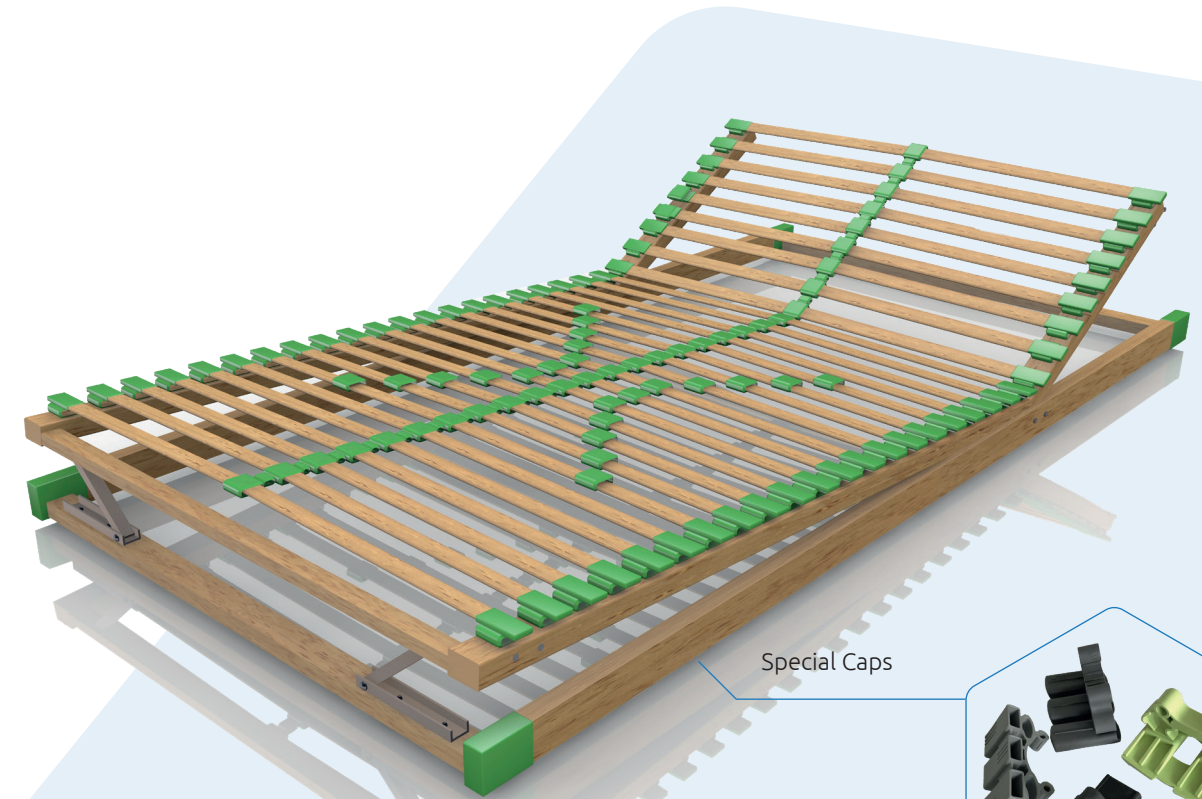

Special Caps

Bed slats caps

Further products and informations are available on request!
+49 (0) 3423 661 0
info@pcw.gmbh

Only a couple examples of What you can produce with our compounds

Industrial applications

(Mainly SEBS and Engineering Plastics)

- Steering rollers, Tires
- Sealing for toolboxes
- Handles for tools and power tools
- shock and vibration absorbers for electrical tools
- Hoses and hose connectors
- Valves and diaphragms
- Tunnel seals

Sports

(Mainly SEBS, SBS and Engineering Plastics)

- Handles for sports equipment
- Diving goggles and flippers
- soft protectors and shock absorbers
- Eyeglass frames
- Golf article, Golf car's parts

Toys

(Mainly SBS, SEBS and Engineering Plastics)

- Teething rings
- „Soft Touch“ bath toy
- Dolls
- Toy bicycles
- Toy car wheels
- Paint toys
- „Soft Touch“ handles and parts for toys

Packaging

(Mainly SEBS, Additive and SBS)

- Bottles seals
- Bottles handles
- Caps and closures
- Clothes hanger cover
- Storage container seal
- 11 Other (Mainly Additive and SEBS)
- Plasticizer additive for plastics
- Raw material / additive for candle mixes

Household appliances

(Mainly SEBS and Engineering Plastics)

- Drain hoses and hose connections for washing machines and dishwashers
- Anti-slip feet and mats
- Sealing and sealing
- Bellows and bellows
- Vibration and shock absorbers
- Refrigerator sealing
- Different garden applications like water hose or garden equipment etc.

Installations and superstructures

(Mainly SEBS and TPO)

- Coextruded window seals
- Seals for shower cubicles
- Seals for doors, pipes and fittings
- expansion joints
- Roof membranes
- Water sealing systems

Constructions and configurations

(Mainly SEBS, SBS and TPO)

- Bed springs and slatted caps
- Armrests
- „Soft Touch“ handles and functional elements for furniture
- Coverings and coverings
- Sealing for the sanitary area
- objects and „Soft Touch“ parts of all kinds
- Garden furniture and accessories
- Ice cube maker

Electrical and electronics

(Mainly SEBS, TPO and Engineering Plastics)

- Injected seals for electrical and electronic housings
- Telephone and mobile phone parts and housings
- Seals for lighting systems and electronics housings
- Vibration and noise insulation for electrical and electronic accessories
- Buttons and switches
- Cable management and flexible cable insulation
- Cable connector
- industrial plugs and connectors for housings

Care and health

(Mainly SEBS and SBS)

- Toothbrush handles
- Shaver
- Handles and parts for shavers
- Handles for care products
- Covers and handles for hygienic products
- Valves and diaphragms
- Nipples and dummies


Automotive

(SEBS, TPO and Engineering Plastics)

- Interior storage bins and mats
- Anti-slip mats
- Switch covers
- Gear shifts
- Airbag covers

(TPO and Engineering Plastics)

- Spray protection
- Spoiler, spoiler edges, corner parts
- Battery cable

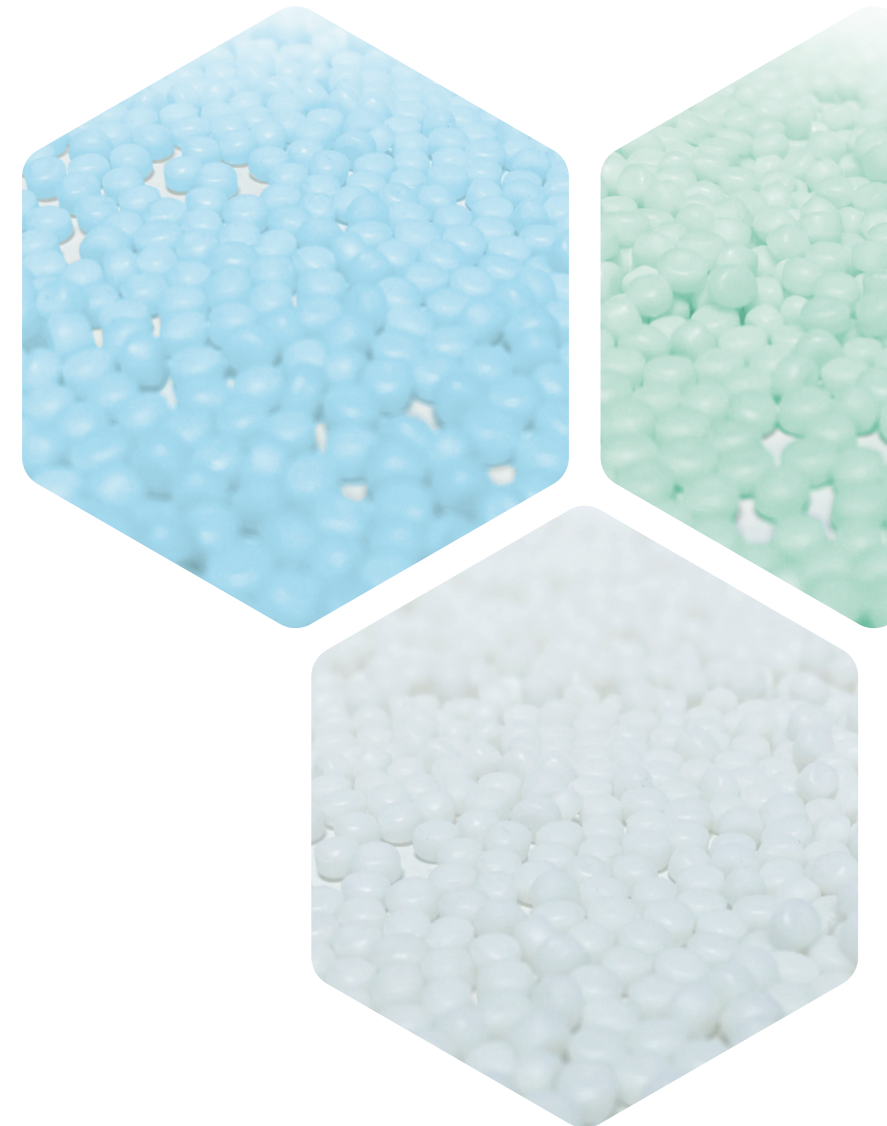

Further products and informations
are available on request!
+49 (0) 3423 661 0
info@pcw.gmbh



Innovativ und Kompetent

Mit der Leidenschaft für technische Perfektion und einem sensiblen Gespür für die Erfordernisse und Entwicklungen des Marktes ist die PCW GmbH der Spezialist für Compounds unter dem Dach der Advance Holding.

Die Advance Holding Gruppe erzielt heute mit ca. 800 Mitarbeitenden einen Umsatz von mehr als 520 Millionen Euro und verfügt mit insgesamt 5 Standorten in Deutschland und Nordamerika über bedeutende Markterfahrung und Produktionskapazität.

Weitere Informationen finden Sie auf unserer Website oder kontaktieren Sie uns gerne persönlich.



+49 3423 661 0



info@pcw.gmbh



www.pcw.gmbh

Innovativ und Kompetent – Ihr Partner für Compounds. Am traditionsreichen Standort Eilenburg beschäftigt sich die PCW GmbH mit der Entwicklung und Produktion von maßgeschneiderten Compounds für die kunststoffverarbeitende Industrie.

PCW GmbH

Am Alten Celluloidwerk 7
D-04838 Eilenburg

phone: +49 3423 661 0

fax: +49 3423 661 485

www.pcw.gmbh



Der Inhalt dieser Druckschrift ist unverbindlich und dient ausschließlich Informationszwecken. Die Informationen sind keine Angaben im Sinne der anwendbaren gesetzlichen Bestimmungen und begründen kein Vertragsverhältnis hinsichtlich der vorgestellten Produkte. Sie erheben im Übrigen keinen Anspruch auf Vollständigkeit und dienen nicht der technischen Spezifikation. Soweit nicht ausdrücklich anderweitig vereinbart, werden sie auch nicht Vertragsbestandteil bestehender oder künftiger Verträge mit der PCW GmbH.